Approved For Release 2005/07/13 : CIA-RDP70-00211R000800050027-8

20 March 1961

20 each

Industrial Type Shelving for Bulk Storage

1. Single Faced Closed Sections, 18" D., 36" W., 50 each 107" H 2. Rack Ends 12 each 3. Base Enclosures 3" x 36" 50 each

> Units of Equipment to be assembled and Installed by Agency Personnel to form

2 ranges of 8 single faced sections

2 ranges of 6 double faced sections

1 range of 2 double faced sections

1 range of 3 double faced sections


4. Base Enclosures 3" x 18"

Dimensions: Height of sections 107" to provide a 3" base and 7 shelf openings. All shelf openings to be $15\frac{1}{2}$ " from the filing surfaces of one shelf to the lowest projection of the next higher shelf except the top shelf opening which is to be 11". The 36" width of the assembled section is to be constructed to provide a minimum of 342 clearance between shelf uprights. The shelves are to be reinforced, front and back, to withstand a shelf pressure of approximately 125/150 pounds per foot. The shelves are to be independently and easily adjustable on la centers. (An adjustable shelf requiring the use of a nut and bolt assembly is not acceptable). The thickness of the individual shelves must be formed in a manner not to exceed 1 1/8". Ranges of shelving must be top braced at right angles to the long axis of the ranges at intervals of 6 feet. Individual sections of shelving must be adequately braced on at least end and on one side to form a rigid structure.

Note Procurement Division - Office of Logistics

Suggested Vendors - Lyon Metal Products, Inc., since equipment is expansion of a previous installation of the Lyon Equipment.

Total Estimated Cost \$1,500.

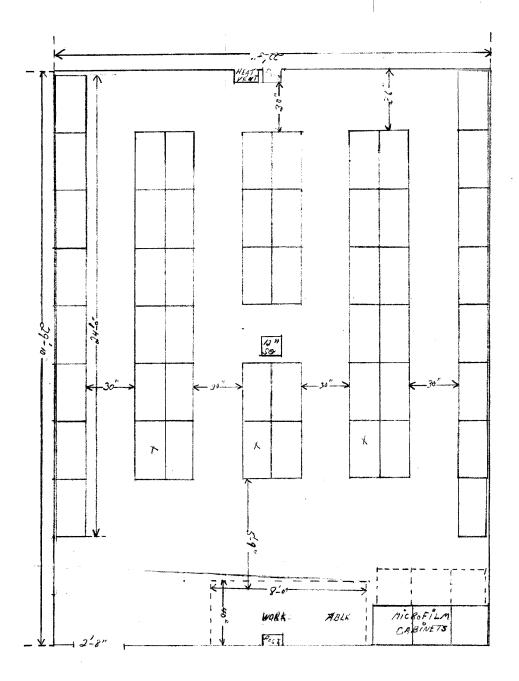

Next 3 Page(s) In Document Exempt